




GSMTM
INDUSTRIES

CABLE TERMINAL END & CONNECTORS

Global Sourcing & Manufacturing


Quality Beyond Expectations

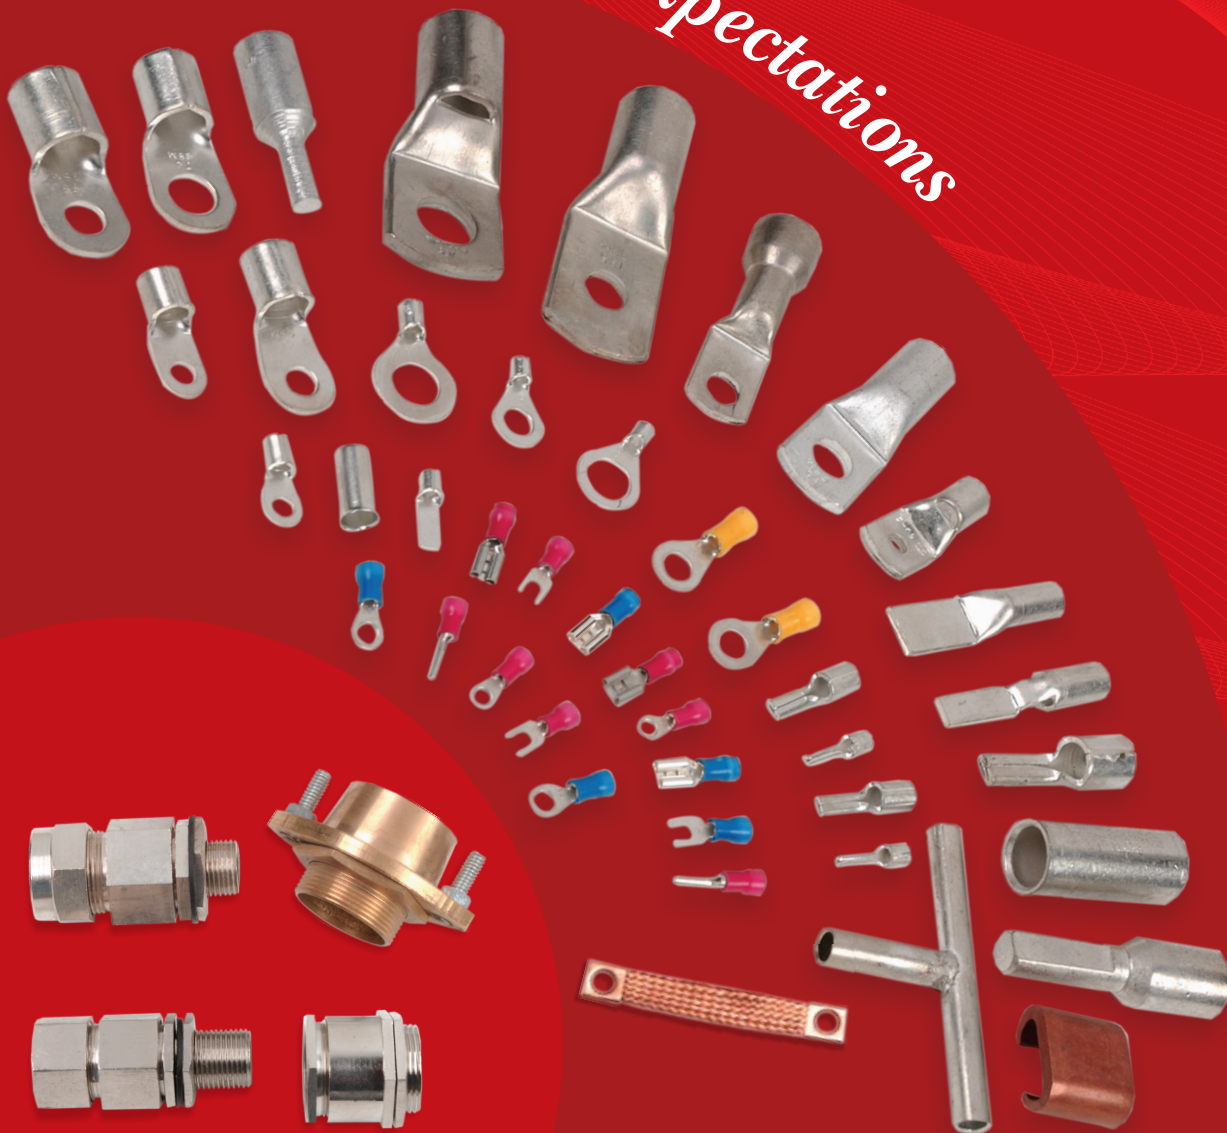



GSM INDUSTRIES

CABLE TERMINAL END & CONNECTORS




COPPER TUBE TERMINAL ENDS LIGHT DUTY - CRIMPING TYPE

mm ²	E	A	C	D	B	J	Cat No.
2.5	5.2	2.0	3.7	9	7	20	GCUS-05
4	6.5	3.1	4.8	11	7	22	GCUS-06
6	6.5	3.8	5.5	11	9	24	GCUS-07
10	6.5	4.4	6.2	11	9	24	GCUS-08
16	6.5	5.3	7.1	11	12	30	GCUS-09
25	6.5	7.0	9.0	13	12	37	GCUS-10
25	8.2	7.0	9.0	13	12	37	GCUS-052
35	6.5	8.0	10.0	15	12	37	GCUS-11
35	8.2	8.0	10.0	15	12	37	GCUS-12
50	6.5	9.2	11.2	16	16	45	GCUS-13
50	8.2	9.2	11.2	16	16	45	GCUS-14
50	10.2	9.2	11.2	16	16	45	GCUS-15
70	8.2	11.5	13.8	20	18	56	GCUS-16
70	10.2	11.5	13.8	20	18	56	GCUS-17
70	12.7	11.5	13.8	20	18	56	GCUS-18
95	10.2	12.8	15.6	23	20	58	GCUS-19
95	12.7	12.8	15.6	23	20	58	GCUS-20
120	10.2	14.8	17.8	26	22	62	GCUS-21
120	12.7	14.8	17.8	26	22	62	GCUS-22
120	16.2	14.8	17.8	26	22	62	GCUS-23
150	10.2	16.0	19.6	28	26	70	GCUS-24
150	12.7	16.0	19.6	28	26	70	GCUS-25
150	16.2	16.0	19.6	28	26	70	GCUS-26
185	12.7	18.0	22.0	32	30	83	GCUS-27
185	16.2	18.0	22.0	32	30	83	GCUS-28
225	16.2	20.0	24.0	35	34	95	GCUS-231
240	16.2	22.0	26.0	38	36	97	GCUS-29
240	20.3	22.0	26.0	38	36	97	GCUS-30
300	16.2	24.0	28.7	42	39	103	GCUS-31
300	20.3	24.0	28.7	42	39	103	GCUS-32
400	20.3	28.0	33.2	49	44	116	GCUS-33
500	20.3	30.0	36.0	53	48	120	GCUS-34
630	20.3	35.0	41.5	61	55	137	GCUS-35
800	—	39.0	46.3	67	65	165	GCUS-062
1000	—	43.0	53.8	76	90	210	GCUS-076


COPPER TUBE TERMINALS - HEAVY DUTY LONG BARREL

mm ²	E	A	C	D	B	J	Cat No.
25	8.2	7.0	9.0	13	16	41	GCUS-282
35	8.2	8.0	10.6	15	20	48	GCUS-283
50	8.2	9.2	12.2	17	26	59	GCUS-284
70	10.2	11.5	15.0	20	28	66	GCUS-285
95	12.7	12.8	17.0	24	32	74	GCUS-286
120	12.7	14.8	19.6	28	35	82	GCUS-287
150	12.7	16.0	21.2	30	38	86	GCUS-288
185	12.7	18.0	24.0	34	43	95	GCUS-289
240	16.4	22.0	28.0	40	50	112	GCUS-290
300	16.4	25.0	32.0	45	57	123	GCUS-291
400	20.3	29.0	37.0	51	65	136	GCUS-292
500	21.0	30.0	39.0	56	72	148	GCUS-293
630	21.0	35.0	45.0	65	84	172	GCUS-294
800	—	39.0	50.6	73	117	209	GCUS-295
1000	—	43.0	56.2	81	135	245	GCUS-296




COPPER SOLDERING TYPE AMP (LIGHT DUTY)

AMP	E	A	C	D	B	J	Cat No.
15A	3.2	3.9	4.8	7	7	19	GCUS-201
30A	5.2	5.2	6.3	9	9	23	GCUS-202
60A	6.4	8.1	9.5	14	14	36	GCUS-203
100A	9.5	10.9	12.7	19	19	49	GCUS-204
150A	9.5	13.9	15.9	24	23	57	GCUS-205
200A	12.7	16.6	19.0	28	27	66	GCUS-206
300A	12.7	19.0	22.2	33	28	80	GCUS-207
400A	15.9	22.2	25.4	38	32	89	GCUS-208
500A	19.0	25.4	28.6	43	38	105	GCUS-209
600A	19.0	27.8	31.8	47	44	115	GCUS-210
800A	20.3	31.7	38.1	56	47	121	GCUS-211
1000A	20.3	38.1	44.5	66	46	152	GCUS-212




COPPER TUBE TERMINAL ENDS LIGH DUTY LONG BARREL

mm ²	E	A	C	D	B	J	Cat No.
2.5	5.2	2.0	3.7	9	10.5	23.5	GCEB-05
4	6.5	3.1	4.8	11	10.5	25.5	GCEB-06
6	6.5	3.8	5.5	11	13.5	28.5	GCEB-07
10	6.5	4.4	6.2	11	13.5	28.5	GCEB-08
16	6.5	5.3	7.1	11	18	36	GCEB-09
25	6.5	7.0	9.0	13	18	43	GCEB-10
25	8.2	7.0	9.0	13	18	43	GCEB-052
35	6.5	8.0	10.0	15	18	43	GCEB-11
35	8.2	8.0	10.0	15	18	43	GCEB-12
50	6.5	9.2	11.2	16	24	53	GCEB-13
50	8.2	9.2	11.2	16	24	53	GCEB-14
50	10.2	9.2	11.2	16	24	53	GCEB-15
70	8.2	11.5	13.8	20	27	65	GCEB-16
70	10.2	11.5	13.8	20	27	65	GCEB-17
70	12.7	11.5	13.8	20	27	65	GCEB-18
95	10.2	12.8	15.6	23	30	68	GCEB-19
95	12.7	12.8	15.6	23	30	68	GCEB-20
120	10.2	14.8	17.8	26	33	73	GCEB-21
120	12.7	14.8	17.8	26	33	73	GCEB-22
120	16.2	14.8	17.8	26	33	73	GCEB-23
150	10.2	16.0	19.6	28	39	83	GCEB-24
150	12.7	16.0	19.6	28	39	83	GCEB-25
150	16.2	16.0	19.6	28	39	83	GCEB-26
185	12.7	18.0	22.0	32	45	98	GCEB-27
185	16.2	18.0	22.0	32	45	98	GCEB-28
225	16.2	20.0	24.0	35	51	112	GCEB-231
240	16.2	22.0	26.0	38	54	115	GCEB-29
240	20.3	22.0	26.0	38	54	115	GCEB-30
300	16.2	24.0	28.7	42	58	122	GCEB-31
300	20.3	24.0	28.7	42	58	122	GCEB-32
400	20.3	28.0	33.2	49	66	138	GCEB-33
500	20.3	30.0	36.0	53	72	144	GCEB-34
630	20.3	35.0	41.5	61	83	165	GCEB-35
800	—	39.0	46.3	67	98	198	GCEB-062
1000	—	43.0	53.8	76	135	255	GCEB-076



COPPER IN-LINE CONNECTORS - HEAVY DUTY

mm ²	A	C	J	Cat No.
1.5	1.8	3.7	12	GCB-41
2.5	2.4	4.0	15	GEB-454
4.0	3.1	4.8	15	GCB-3
6.0	3.8	5.5	15	GCB-4
10	4.5	6.2	20	GEH460
16	5.4	7.1	20	GCB-6
20	6.0	7.7	22	GCB-47
25	6.8	8.8	32	GCB-24
35	8.2	10.6	36	GCB-25
50	9.5	12.4	40	GCB-26
70	11.2	14.7	40	GCB-51
95	13.5	17.4	45	GCB-52
120	15.0	19.4	45	GCB-53
150	16.5	21.2	55	GCB-54
185	18.5	23.5	65	GCB-55
240	21.0	26.5	80	GCB-56
300	23.5	30.0	85	GCB-57
400	26.8	34.8	90	GCB-58
500	30.0	39.0	100	GCB-59
550	31.7	41.4	100	GCB-60
630	35.0	45.0	110	GCB-61
800	39.0	50.6	150	GCB-42
1000	43.0	56.2	170	GCB-43




COPPER TUBE TERMINAL ENDS WITH INSPECTION HOLE - EXPORT SERIES

mm ²	E	A	C	D	B	J	Cat No.
1.5	5.2	1.8	3.7	8	5	16	GCUS-538
1.5	6.5	1.8	3.7	10	5	18	GCUS-539
2.5	4.2	2.4	4.0	8	7	18	GCUS-388
2.5	5.2	2.4	4.0	10	7	20	GCUS-540
2.5	6.5	2.4	4.0	10	7	20	GCUS-541
4	5.2	3.1	4.8	10	7	20	GCUS-389
4	6.5	3.1	4.8	10	7	20	GCUS-543
6	5.2	3.8	5.5	10	9	23	GCUS-390
6	6.5	3.8	5.5	12	9	27	GCUS-544
6	8.4	3.8	5.5	12	9	27	GCUS-545
10	6.5	4.5	6.2	12	9	25	GCUS-353
10	8.4	4.5	6.2	12	9	27	GCUS-547
16	6.5	5.4	7.1	12	12	30	GCUS-547
16	8.4	5.4	7.1	12	12	32	GCUS-549
20	8.4	6.0	7.7	12	12	32	GCUS-550
25	6.5	6.8	8.8	13	12	30	GCUS-355
25	8.4	6.8	8.8	18	12	37	GCUS-551
25	10.5	6.8	8.8	18	12	37	GCUS-552
35	6.5	8.2	10.6	15	12	35	GCUS-542
35	8.4	8.2	10.6	15	12	35	GCUS-356
35	10.5	8.2	10.6	18	12	38	GCUS-554
50	8.4	9.5	12.4	18	16	43	GCUS-357
50	10.5	9.5	12.4	18	16	43	GCUS-556
70	8.4	11.2	14.7	21	18	50	GCUS-557
70	10.5	11.2	14.7	21	18	50	GCUS-358
70	13.0	11.2	14.7	21	18	50	GCUS-559
95	10.5	13.5	17.4	25	20	55	GCUS-359
95	13.0	13.5	17.4	25	20	55	GCUS-561
120	13.0	15.0	19.4	28	22	60	GCUS-241
120	17.0	15.0	19.4	28	22	64	GCUS-546
150	13.0	16.5	21.2	30	26	69	GCUS-242
150	17.0	16.5	21.2	30	26	69	GCUS-564
185	17.0	18.5	23.5	34	32	78	GCUS-243
240	17.0	21.0	26.5	38	38	92	GCUS-244
240	21.0	21.0	26.5	38	38	92	GCUS-567
300	17.0	23.5	30.0	43	42	101	GCUS-245
300	21.0	23.5	30.0	43	42	101	GCUS-569
400	17.0	26.8	34.8	50	44	114	GCUS-246
400	21.0	26.8	34.8	50	44	114	GCUS-571
500	21.0	30.0	39.0	56	48	124	GCUS-247
550	21.0	31.7	41.0	60	52	132	GCUS-573
630	21.0	35.0	45.0	65	56	144	GCUS-248
800	—	39.0	50.6	73	78	170	GCUS-599
1000	—	43.0					



GSMTM INDUSTRIES

CABLE TERMINAL END & CONNECTORS

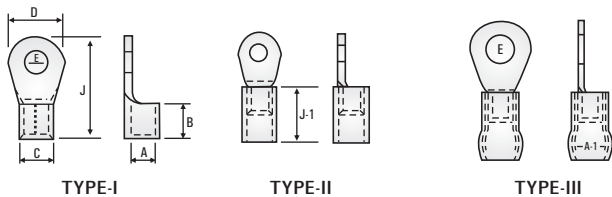

TYPE-I


TYPE-II

TYPE-III

COPPER RING TONGUE TERMINAL ENDS

mm ²	E	A	C	D	B	J	Cat No.	J-1	Cat No.(II)	AI	Cat No.(III)
1.5	3.2	1.6	3.2	6	5	14	7001	10	7054	3.6	7437
1.5	3.7	1.6	3.2	6	5	14	7002	10	7055	3.6	7438
1.5	4.2	1.6	3.2	6	5	14	7003	10	7056	3.6	7439
1.5	3.7	1.6	3.2	6.8	5	14	7048	10	7058	3.6	7441
1.5	4.2	1.6	3.2	8	5	13	7004	10	7061	3.6	7444
1.5	5.2	1.6	3.2	8	5	16	7005	10	7062	3.6	7445
1.5	4.2	1.6	3.2	7	5	14.5	7154	10	7063	3.6	7446
1.5	5.2	1.6	3.2	10	5	18	1006	10	7065	3.6	7448
1.5	6.4	1.6	3.2	10	5	18	7007	10	7066	3.6	7449
1.5	6.4	1.6	3.2	12	5	18	7106	10	7067	3.6	7450
2.5	3.2	2.3	3.9	6.5	5	12.7	7107	10	7068	4.4	7451
2.5	3.7	2.3	3.9	6.5	5	12.7	7008	10	7069	4.4	7452
2.5	3.7	2.3	3.9	8	5	16	7108	10	7070	4.4	7453
2.5	4.2	2.3	3.9	8	5	16	7009	10	7071	4.4	7454
2.5	5.2	2.3	3.9	8	5	16	7010	10	7072	4.4	7455
2.5	5.2	2.3	3.9	10	5	18	7109	10	7073	4.4	7456
2.5	6.4	2.3	3.9	10	5	18	7011	10	7074	4.4	7457
2.5	5.2	2.3	3.9	12	5	22	7110	10	7075	4.4	7458
2.5	6.4	2.3	3.9	12	5	22	7012	10	7076	4.4	7459
2.5	8.2	2.3	3.9	12	5	22	7013	10	7077	4.4	7460
2.5	6.4	2.3	3.9	16	5	25	7111	10	7078	4.4	7461
2.5	8.2	2.3	3.9	16	5	25	7014	10	7079	4.4	7462
2.5	10.2	2.3	3.9	16	5	25	7015	10	7080	4.4	7463
2.5	10.2	2.3	3.9	18	5	29	7151	10	7081	4.4	7464
2.5	12.7	2.3	3.9	18	5	29	7047	10	7082	4.4	7465
4.6	4.2	3.5	5.5	8	6	17	7155	14	7083	6.4	7466
4.6	5.2	3.5	5.5	8	6	17	7050	14	7084	6.4	7467
4.6	4.2	3.5	5.5	10	6	19	7112	14	7085	6.4	7468
4.6	5.2	3.5	5.5	10	6	19	7016	14	7086	6.4	7469
4.6	5.2	3.5	5.5	8	6	22.8	7157	14	7087	6.4	7470
4.6	5.2	3.5	5.5	12	6	20	7113	14	7088	6.4	7471
4.6	6.4	3.5	5.5	12	6	20	7017	14	7089	6.4	7472
4.6	8.2	3.5	5.5	12	6	20	7018	14	7090	6.4	7473
4.6	5.2	3.5	5.5	12	6	22	7114	14	7091	6.4	7474
4.6	6.4	3.5	5.5	12	6	22	7019	14	7092	6.4	7475
4.6	6.4	3.5	5.5	14	6	25.5	7115	14	7093	6.4	7476
4.6	8.2	3.5	5.5	14	6	25.5	7020	14	7094	6.4	7477
4.6	8.2	3.5	5.5	16	6	30	7116	14	7096	6.4	7479
4.6	10.2	3.5	5.5	16	6	30	7022	14	7097	6.4	7480
4.6	8.2	3.5	5.5	18	6	30	7117	14	7098	6.4	7481
4.6	10.2	3.5	5.5	18	6	30	7023	14	7099	6.4	7482
4.6	12.7	3.5	5.5	18	6	30	7024	14	7100	6.4	7483
10	4.2	4.3	6.3	10	8	22	7118	16	7389	6.8	7484
10	5.2	4.3	6.3	10	8	22	7025	16	7390	6.8	7485
10	5.2	4.3	6.3	10	8	20	7026	16	7392	6.8	7487
10	6.4	4.3	6.3	12	8	23	7120	16	7393	6.8	7488
10	8.2	4.3	6.3	16	8	27	7121	16	7394	6.8	7489
10	8.2	4.3	6.3	18	8	30	7122	16	7395	6.8	7490
10	10.2	4.3	6.3	18	8	30	7027	16	7396	6.8	7491
10	10.2	4.3	6.3	22	8	34	7123	16	7397	6.8	7492
10	12.7	4.3	6.3	22	8	34	7028	16	7398	6.8	7493
16	5.2	5.6	8.0	10	10	24	7124	20	7399	10.9	7494
16	6.4	5.6	8.0	12	10	26	7029	20	7401	10.9	7496
16	6.4	5.6	8.0	16	10	30	7126	20	7402	10.9	7497
16	8.2	5.6	8.0	16	10	30	7030	20	7403	10.9	7498
16	8.2	5.6	8.0	18	10	33	7127	20	7405	10.9	7500
16	10.2	5.6	8.0	18	10	33	7032	20	7406	10.9	7501
16	10.2	5.6	8.0	22	10	35	7128	20	7407	10.9	7502
16	12.7	5.6	8.0	22	10	35	7033	20	7408	10.9	7503

mm ²	E	A	C	D	B	J	Cat No.
25	6.4	7.5	11.1	12	11	31	7156
25	6.4	7.5	11.1	16	11	30	7129
25	8.2	7.5	11.1	16	11	30	7034
25	10.2	7.5	11.1	16	11	30	7035
25	6.4	7.5	11.1	16	11	33	7130
25	8.2	7.5	11.1	16	11	33	7036
25	10.2	7.5	11.1	18	11	34	7131
25	10.2	7.5	11.1	22	11	42	7132
25	12.7	7.5	11.1	22	11	42	7037
35	6.4	9.0	12.6	16	12	31	7133
35	8.2	9.0	12.6	16	12	31	7038
35	8.2	9.0	12.6	16	12	36	7134
35	10.2	9.0	12.6	18	12	36	7039
35	10.2	9.0	12.6	22	12	42	7135
35	12.7	9.0	12.6	22	12	42	7040
50	8.2	10.5	14.1	18	16	43	7136
50	10.2	10.5	14.1	18	16	43	7041
50	10.2	10.5	14.1	22	16	43	7137
50	10.2	10.5	14.1	24	16	48	7138
50	12.7	10.5	14.1	24	16	48	7042
50	12.7	10.5	14.0	32	16	54	7139
70	10.2	12.0	16	22	18	47	7140
70	12.7	12.0	16	22	18	47	7043
70	16.2	12.0	16	24	18	48	7141
70	16.2	12.0	16.0	28	18	54	7142
95	10.2	13.5	18.1	22	20	46	7143
95	10.2	13.5	18.1	24	20	50	7144
95	12.7	13.5	18.1	24	20	50	7044
95	16.2	13.5	18.1	28	20	58	7145
120	12.7	15.0	20.2	26	22	52	7146
120	16.2	15.0	20.2	32	22	64	7147
120	20.3	15.0	20.2	40	22	72	7148
150	12.7	16.5	23.7	34	24	66	7149
150	16.2	16.5	23.7	34	24	66	7045
150	16.2	16.5	23.7	40	24	74	7150
150	20.3	16.5	23.7	40	24	74	7046

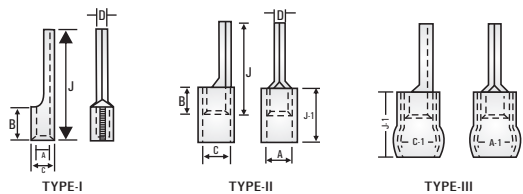


TYPE-I

TYPE-II

TYPE-III

COPPER CRIMPING PIN TYPE TERMINALS

mm ²	A	C	B	J	Cat No.	Cat No.(II)	AI	Cat No.(III)
1.5	1.6	3.2	5	17	CP-9	CP-17	3.6	CP-26
1.5	2.3	3.9	5	17	CP-1	CP-18	4.4	CP-27
2.5	2.3	3.9	5	17	CP-2	CP-19	4.4	CP-28
4.0	2.9	4.9	6	20	CP-3	CP-20	6.4	CP-29
4.0	3.6	5.6	6	20	CP-4	CP-21	6.4	CP-30
6.0	3.6	5.6	6	20	CP-5	CP-22	6.4	CP-31
10	4.5	6.7	8	22	CP-7			
16	5.8	8.2	10	26	CP-8			

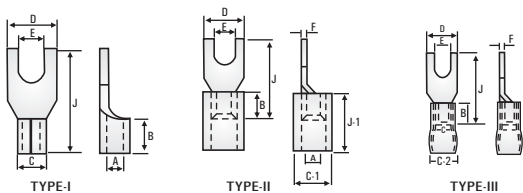

TYPE-I

TYPE-II

TYPE-III


COPPER CRIMPING FORK TYPE TERMINALS

mm ²	E	A	C	B	J	Cat No.	Cat No.(II)	Cat No.(III)
1.5	5.1	1.6	3.2	5.0	21	7214	7925	7934
1.5	3.5	1.6	3.2	4.0	14.3	7249	7926	7935
1.5	3.0	2.0	2.8	5.0	13	7250	7927	7936
2.5	3.5	2.3	3.9	5.0	15	7251	7928	7937
2.5	5.0	2.6	4.6	6.2	21	7280	7929	7938
4-6	3.1	3.5	5.5	6.0	15	7252	7930	7939
4-6	3.5	3.5	5.5	6.0	15	7253	7931	7940
10	6.5	4.5	6.9	8.0	27	7254	7932	7941
10	8.2	4.5	6.9	8.0	27	7255	7933	7942





SINGLE COMPRESSION MEDIUM DUTY CABLE GLANDS

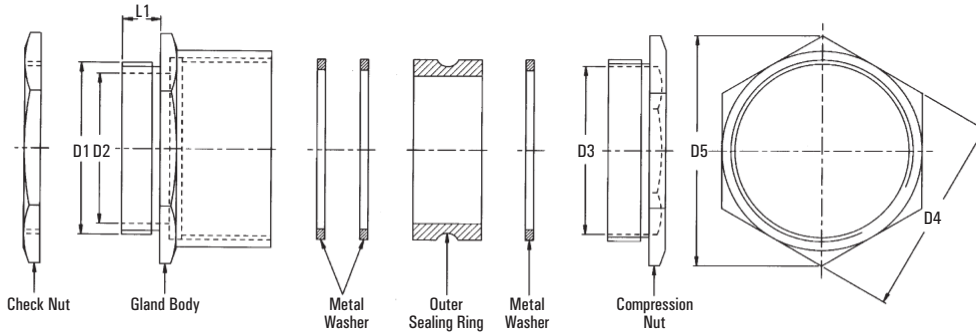

Technical Date :


Material : Brass
 Plating : Nickle Plated
 Entry Threads : BSC Standard (Metric / also available)
 Sealing Rubber Ring : Natural

Application : Used in normal climatic condition for armoured & unarmoured cables.

Suitable Cable Over all Dia		Size		D1 Nipple Entry	D2 Dia.	D3 Dia.	D4 (A/F)	D5 (A/C)	L1 Length
From	To	mm	inches	inches	ø mm	ø mm	mm	mm	mm
6.0	9.0	10	3/8"	5/8"	12.0	12.5	18.0	20.5	7.0
9.0	12.0	12	1/2"	5/8"	12.5	15.5	20.5	23.5	7.0
12.0	14.0	16	5/8"	3/4"	15.0	16.0	20.5	23.5	7.0*
14.0	16.0	19	3/4"	3/4"	15.0	18.0	23.0	26.0	7.0*
16.0	18.0	22	7/8"	3/4"	15.0	20.5	25.0	29.0	7.0*
18.0	21.5	25	1"	1"	21.0	23.5	28.5	32.5	8.0*
21.5	26.0	28	1 1/8"	1 1/8"	24.5	27.5	33.0	38.0	8.5*
26.0	31.0	32	1 1/4"	1 1/4"	27.0	31.5	37.0	43.0	11.0*
31.0	34.0	35	1 3/8"	1 3/8"	29.5	35.5	42.0	48.0	11.0*
34.0	38.0	38	1 1/2"	1 1/2"	33.0	38.0	45.0	52.0	11.0*
38.0	42.0	45	1 3/4"	1 3/4"	38.5	44.5	52.0	60.0	11.0*
42.0	48.0	50	2"	2"	45.0	52.0	58.0	67.0	11.0*
48.0	54.0	57	2 1/4"	2 1/4"	51.0	57.5	65.0	75.0	13.0
54.0	60.0	63	2 1/2"	2 1/2"	57.0	63.0	70.0	81.0	13.5
60.0	66.0	70	2 3/4"	2 3/4"	63.0	69.0	77.0	89.0	13.5
66.0	72.0	75	3"	3"	69.0	75.0	83.0	96.0	13.5
72.0	78.0	82	3 1/4"	3 1/4"	76.0	81.5	90.5	104.0	14.0
78.0	84.0	88	3 1/2"	3 1/2"	77.0	84.0	96.0	110.0	15.0
84.0	92.0	100	4"	4"	90.5	99.0	110.0	126.0	16.0

* Gland body with long nipple length also available | Tolerances ± 1mm

DOUBLE COMPRESSION MEDIUM DUTY CABLE GLANDS

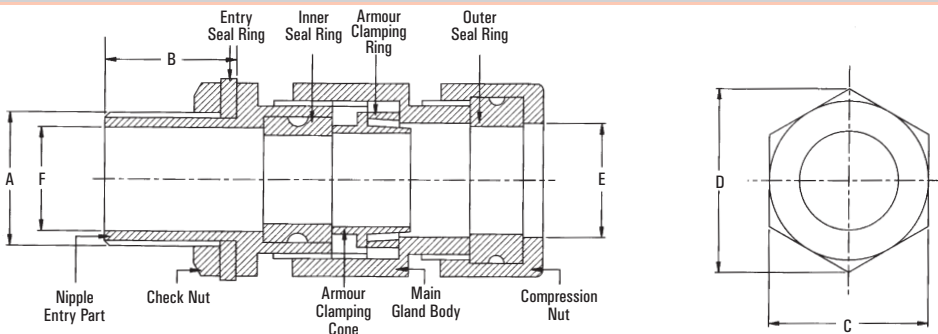

Technical Date :

Material : Brass
 Plating : Nickle Plated
 Entry Threads : BSC Standard (Metric / NTP also available)
 Sealing Rubber Ring : Natural

Application : Used in normal climatic condition for armoured & unarmoured cables.

Suitable Cable Over all Dia		Size		A Nipple Entry	B Length	C (A/F)	D (A/C)	E Dia.	F Dia.
From	To	mm	inches	inches	mm	mm	mm	ø mm	ø mm
6.0	9.0	10	3/8"	5/8"	25.0	20.5	23.5	10.0	7.0
6.0	12.0	12	1/2"	5/8"	25.0	23.0	26.0	13.5	11.0
12.0	16.5	16	5/8"	3/4"	25.0	23.0	26.0	16.5	14.0
16.5	18.5	19	3/4"	3/4"	25.0	25.5	29.5	19.0	14.0
18.5	20.0	22	7/8"	3/4"	25.0	28.0	32.0	20.0	14.0
20.0	23.0	25	1"	1"	25.0	31.5	36.0	23.5	19.0
23.0	26.0	28	1 1/8"	1 1/8"	25.0	35.5	41.0	27.0	22.5
26.0	30.0	32	1 1/4"	1 1/4"	25.0	41.0	47.0	32.0	25.5
30.0	33.0	35	1 3/8"	1 1/2"	25.0	44.0	50.5	35.0	27.5
33.0	37.0	38	1 1/2"	1 1/2"	25.0	46.0	53.0	38.0	31.0
37.0	41.0	45	1 3/4"	2"	25.0	57.0	65.5	44.5	42.0
41.0	46.0	50	2"	2"	25.0	61.0	70.5	51.0	42.0
46.0	52.0	57	2 1/4"	2 1/4"	25.0	67.0	77.0	57.0	50.0
52.0	54.0	63	2 1/2"	2 1/2"	25.0	79.0	91.0	63.0	54.5
54.0	61.0	70	2 3/4"	2 3/4"	25.0	82.0	95.0	69.5	62.0
61.0	72.0	75	3"	3"	25.0	90.0	105.0	75.0	65.0
72.0	78.0	82	3 1/4"	3 1/4"	25.0	95.0	109.0	82.0	74.5
78.0	84.0	88	3 1/2"	3 1/2"	25.0	106.0	123.0	88.0	78.0
84.0	94.0	100	4"	4"	25.0	116.0	135.0	98.0	87.0

Tolerances ± 1mm



GSMTM INDUSTRIES

CABLE TERMINAL END
& CONNECTORS

MANUFACTURERS & EXPORTERS OF :

- Electrical Cable Terminals
- Brass Cable Glands
- Pressed And Machined Components
- S.S Cable Ties
- Braided Wire (Wire Mesh)

We can Develop any Taylor made Item
as per customer Drawing or requirement

COMPANY PROFILE :

GSM Industries was established in 2001 and is situated in Mumbai, the Company is building its reputation on both high quality products and rapid service to customers.

GSM has a dynamic engineers team backed by skilled & semi skilled labour force, dedicated to meet all challenges.

Manufacture all our products in house gives us total control from initial design to final dispatch.

This ensures that all products comply with National / International standards like (IS/BS 4579 and Din 46235)

An intense dedication to research development in all phases of business activities and the application of the latest manufacturing techniques has enabled **GSM** to continuously reduce the manufacturing cost, while at the same time update the quality.

QUALITY POLICY :

GSM Industries make the personal commitment to first understand our customers expectations, then to meet or exceed our commitment to those expectations by performing the correct tasks defect free, on time & every time.

*Quality is not just another goal; it is our basic strategy
for survival and future growth.*



B-2/101, Pratap Nagar, Pushpa Park, Malad (E), Mumbai - 400 097, INDIA.
E-Mail : rupesh@gsmindustries.co.in • Website : www.gsmindustries.co.in
Mobile No. : 98191 36555.

Dealer :